

GS2000 GuardScan® Plus **Robust Metal Guard Tour Terminal**

Introduction:

The new GS2000 GuardScan Plus is a more durable Guard Tour Data Collection Terminal, based on RFID technology, it helps you watch over your employees that have had difficulties to track those whose working duties require moving from place to place, such as security guard patrolling, policeman patrolling, remote equipment inspection / maintenance ...etc. The metal housing is the best solution for water-resistant and shock-proof. Use our application software "patrol Manager" you may set up a remarkable Patrol Management System.

Features:

- Robust Baton type metal housing
- Contactless reading
- Single-cell battery operation
- Journal memory 14320 records
- IrDA data transfer from GS2000 handset to base station
- Water-resistant and shock-proof
- Up to 100,000 reading scan on one heavy-duty C size Alkaline battery
- Simple one button operation for scan and communication
- LED and buzzer to show operation status
- Firmware is upgradeable
- Power saving feature for long battery operation

Applications:

- Security personnel patrolling
- Policeman / Military patrolling
- Building guard patrolling
- Community guard patrolling
- Remote equipment inspections/maintenance
- Asset management

RFID transponder specification:

Model No: TAG50

Format: 125KHz, ASK 64 bits, Manchester encoding; 10

digits in Hex

Dimension: Diameter 50mm; inner hole ϕ 4mm;

thickness 2.35mm

Specifications:

| Model Specification | GS2000 Handset | GS2000U / R Base Station |
|-----------------------------|---|-------------------------------------|
| Interface | IrDa | USB or RS232 |
| Power Requirement | Size C / UM-2 Single-Cell Alkaline battery * 1 | USB:5V DC / 200mA RS232: 5VDC |
| Reading Range | ~ 4cm | - |
| Memory | 512K 14320 records | - |
| Indicator | LED / Beeper | LED |
| Frequency and Format | 125KHz, ASK, 64 bits, Manchester encoding | - |
| Operating temperature range | -10 ~ +50 C° | -10 ~ +50 C° |
| Dimensions | ϕ 52 x 168 mm | ϕ 120 x 52 mm |
| Material | Metal housing / Polycarbonate reading head | Polycarbonate |
| Weight | 0.31 kg | 0.32kg |

Ordering Information:

GS2000 - Handset unit


GS2000R – Base station unit with RS232 interface

GS2000U – Base station unit with USB interface

GS2000RBP - Handset unit+ base station unit with RS232 interface GS2000UBP - Handset unit + base station unit with USB interface

GS2000 RS232 / USB start kits available *

The specification is subject to change without notice.

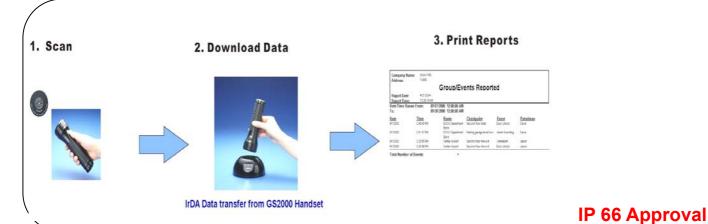

We welcome OEM inquiries

- ♦ Custom design manufacturing is available
- ◆ Custom device programming is available
- ◆ Call factory for other configuration



8F.,NO.31, LANE 169, KANG-NING STREET, HSI-CHIH, TAIPEI, TAIWAN

TEL: 886-2-26954214 FAX: 886-2-26954213

e-mail: gigatms@ms3.hinet.net

http://www.gigatms.com.tw